




# Step Up Slim

Specification Sheet

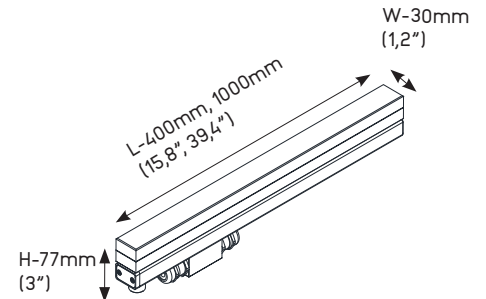

UL STD 1598  
IP67

## LUMINAIRE FEATURES

### Design and Application

- Architectural and landscape lighting
- Recessed floor installation
- Gravel, soil or concrete installation
- UL STD 1598, IP67, Wet location, drive over rated 3000 kg (6600lb)

### Performance

- IK10, laminated & tempered glass, chemically etched
- 12m (39.37') continuous run from one power supply (6m (19.69') left + 6m (19.69') right)
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=60500h
- Supplied with oil and water resistant feed which length matches the length of a fixture
- CRI: > 85
- 2 Step MacAdam

### Safety

- Remote power supply
- Low voltage operation
- Recessed installation

### Sustainability

- Recyclable material
- Replaceable led module

### Installation housing

- SL315 - 401mm (15,8")
- SL317 - 1001mm (39,4")

### Accessories

- 200886 - Removal tool

### Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

Click [here](#) to download fixture installation manual.  
Click [here](#) to download housing installation manual.  
Click [here](#) to download CAD file.  
Click [here](#) to download IES-LTD data.



# Step Up Slim

## ORDERING INFORMATION

### MODEL

FSL

### LENGHT

16

- 15,8" (400mm)

40

- 39,4" (1000mm)

### POWER

L

- L - 3W/ft, 2700K - 3000K, 50lm/ft

H

- H - 7W/ft, 2700K - 3000K, 100lm/ft
- H - 7W/ft, RGBW (W 3000K)

### COLOR TEMP.

27

- 27 - 2700K

30

- 30 - 3000K

RGBW

- RGBW (W 3000K)

### OPTICS

LL

- LL = 120° even illumination

### VOLTAGE

24

- 24 - 24 VDC fixture voltage

### OPTIONS

3

- 3 - luminaire supplied with 3m (10') feed cable

6

- 6 - luminaire supplied with 6m (20') feed cable

9


- 9 - luminaire supplied with 9m (30') feed cable



# Step Up Slim

## INSTALLATION DETAILS

Installation housing - SL315 / SL317

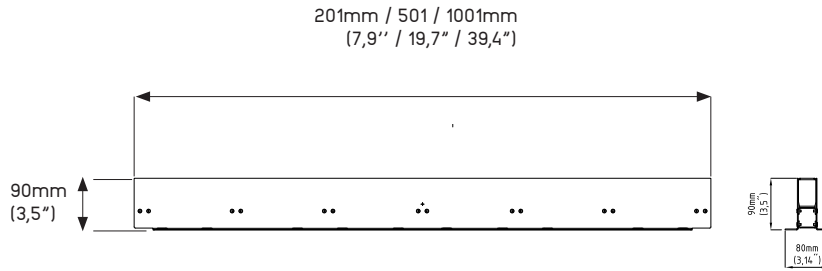

Note:  
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.