



Step Up Wide

Specification Sheet



UL STD 1598
IP67

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Marker light effect
- Chasing light 100mm (3.9") increment
- UL STD 1598, IP67, Wet location, drive over rated 5000 kg (11000lb)

Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=60500h
- Supplied with oil and water resistant 1m (3,3') feed cable as standard
- CRI: > 85
- 2 Step MacAdam

Safety

- Remote or double integrated power supply
- Low/Main voltage operation
- Recessed installation

Sustainability

- Recyclable material
- Amber light - Dark sky friendly

Installation housing


- SLW400 - 401mm (15,7")
- SLW1000 - 1001mm (39,4")

Accessories

- 200886 - Removal tool

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

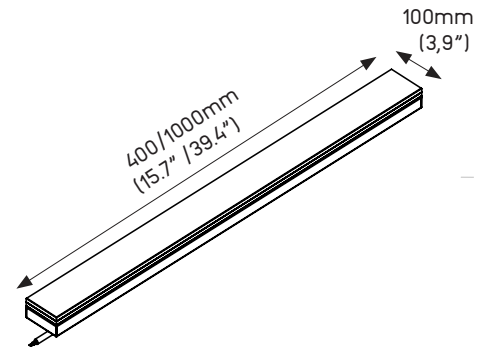



Step Up Wide

ORDERING INFORMATION


☒	MODEL	
☒	FSLW	
☒	LENGHT	
☐	16	• 400mm (15,7")
☐	40	• 1000mm (39,4")
☒	POWER	
☐	L	• L - 3W/ft Amber, 2700K, 3000K, (270lm)
☐	H	• H - 7W/ft Amber, 2700K, 3000K, (510lm)
☐		• L - 3W/ft RGBWA , RGBWA
☐		• H - 7W/ft RGBWA , RGBWA
☐	COLOR TEMP.	
☐	A	• A - Amber
☐	30	• 30 - 3000K
☐	RGBW	• RGBW (W 3000K)
☐	RGBWA	• RGBW+A (Amber) (W 3000K)
☒	OPTICS	
☐	LL	• LL = 120° even illumination
☒	VOLTAGE	
☐	24	• 24 - 24VDC fixture voltage
☐	230	• 230 - 230VAC
☐	110	• 110 - 110 - 277VAC



Step Up Wide

INSTALLATION DETAILS

Installation housing - SLW400 / SLW1000

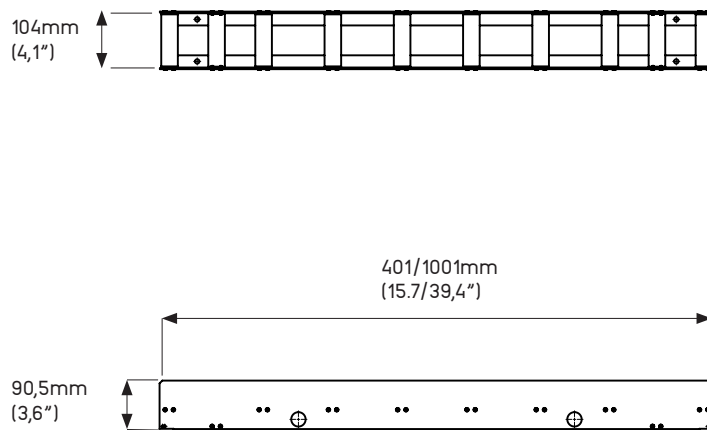

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.